


Datenblatt

Werkstoff	:	Messing (CuZn)
Leiteraufbau	:	siehe Tabelle
Oberfläche	:	galvanisch verzinkt
Hitzebeständigkeit:		max. 100 °C
Norm	:	nach DIN 46225 Form A u.ä.

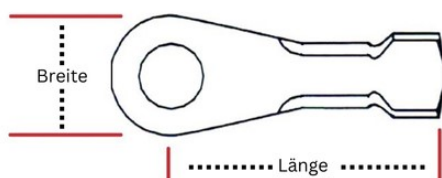

Querschnitt mm ²	Bolzen M	Länge in mm	Breite in mm
0,5 - 1,0	3	18,3	8,0
0,5 - 1,0	4	18,3	8,0
0,5 - 1,0	5	17,5	9,5
0,5 - 1,0	6	22,0	12,0
0,5 - 1,0	8	21,0	14,0
1,5 - 2,5	4	18,3	8,0
1,5 - 2,5	5	17,5	9,5
1,5 - 2,5	6	22,0	12,0
1,5 - 2,5	8	21,0	14,0
4,0 - 6,0	5	20,5	9,5
4,0 - 6,0	6	25,0	12,0

www.Kabelknecht.de

Kabel Langner – Am Burgfried 90 – 84453 Mühldorf